

UZMAN KARDAN

YOKE SHAFTS ASSY / GABELWELLEN / ÇATALLI MİL KOMPLELERİ

25

FIG. 1
COVER TUBE TYPE FEMALE
SPLINE RILSAN COATED


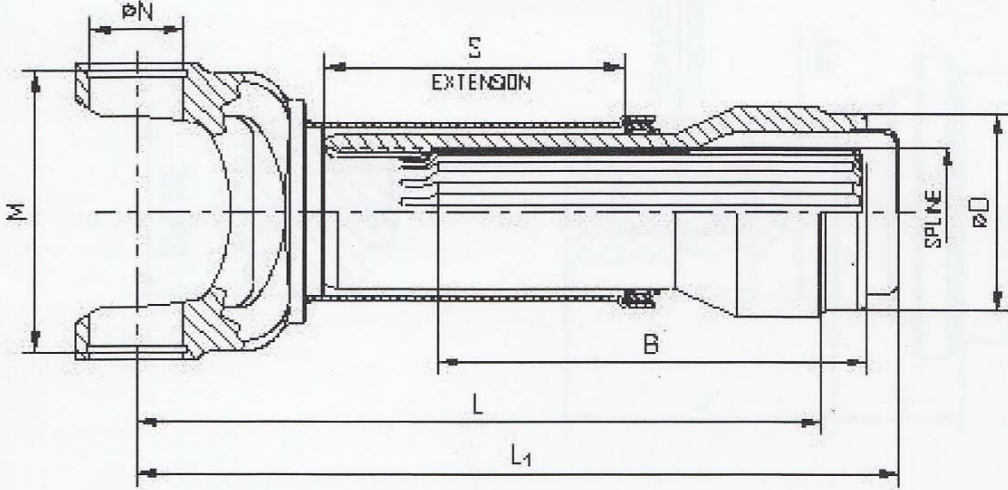


FIG. 2
LIP SEAL TYPE MALE
SPLINE RILSAN COATED

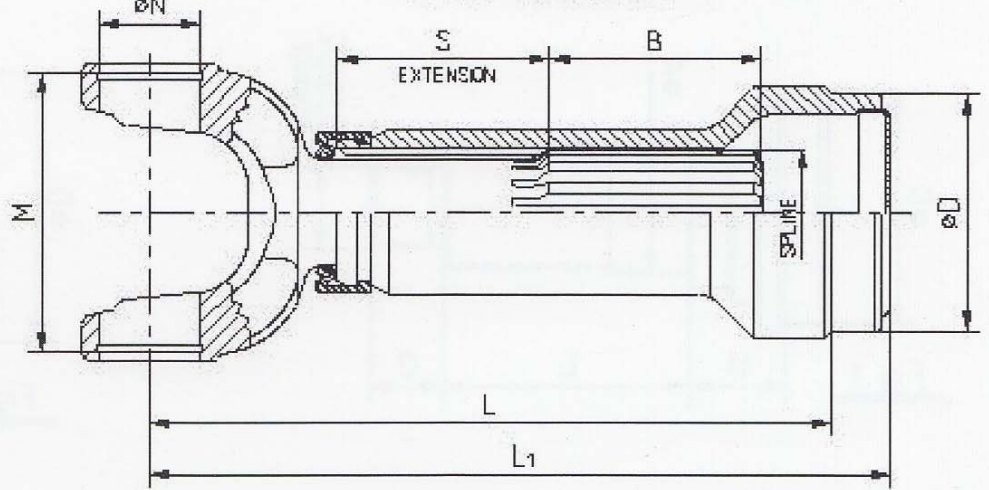

KAT-43K

18/12/2008

SERIE BAUGR SERİ	NEW PART NO TEIL NR NEU YENİ PARÇA NO	FIG.	ANGLE WINKEL AÇI	M	N	L	S	B	L1	D	TUBE O.D.xW.THICKNESS ROHRDURCHMESSERxDICKE BORU ÇAPIXET KALINLIĞI	SPLINE DATA ZAHNPROFIL KANAL ÖLÇÜLERİ
1310	41314301901	2	30°	84,7	27,0	185	60	50,8	200	46,2	2" x 0,095"	SAE 1 3/8"x16C RILSAN
	41314302401	2	20°	84,7	27,0	198	60	61,0	213	73,3	3" x 0,064"	SAE 1 1/2"x16C RILSAN
	41314302402	2	20°	84,7	27,0	198	60	61,0	213	71,6	3" x 0,095"	SAE 1 1/2"x16C RILSAN
1480	41484300701	1	25°	109,2	34,9	217	100	108	234	84,1	90 x 3mm	W 45x2,5x16 DIN5480 RILSAN
	41484300702	1	25°	109,2	34,9	217	100	108	234	84,3	3 1/2" x 0,095"	W 45x2,5x16 DIN5480 RILSAN
	41484300703	1	25°	109,2	34,9	228	115	108	245	64,1	70 x 3mm	W 45x2,5x16 DIN5480 RILSAN
	41484300704	1	25°	109,2	34,9	217	100	108	234	71,7	3" x 0,095"	W 45x2,5x16 DIN5480 RILSAN
1630	41634300801	1	35°	119,3	39,6	293	110	191	324	83,3	90 x 3,5mm	W 55x2,5x20 DIN5480
	41634300802	1	35°	119,3	39,6	293	110	191	324	84,3	3 1/2" x 0,095"	W 55x2,5x20 DIN5480
287	42874300103	1	35°	84,9	30,0	217	100	157	233	44,1	52 x 4mm	W 38x2x18 DIN5480 RILSAN
	42874300104	1	35°	84,9	30,0	209	85	157	225	73,3	3" x 0,064"	W 38x2x18 DIN5480 RILSAN
	42874300105	1	35°	84,9	30,0	209	85	157	225	71,7	3" x 0,095"	W 38x2x18 DIN5480 RILSAN
	42874300106	1	35°	84,9	30,0	220	110	157	237	71,7	3" x 0,095"	W 38x2x18 DIN5480 RILSAN
	42874300108	1	35°	84,9	30,0	217	110	157	233	44,1	50 x 3mm	W 38x2x18 DIN5480 RILSAN
	42874300109	1	35°	84,9	30,0	250	140	157	267	71,7	3" x 0,095"	W 38x2x18 DIN5480 RILSAN
	42874300110	1	35°	84,9	30,0	209	85	157	225	66,6	70 x 2mm	W 38x2x18 DIN5480 RILSAN
350	43504300103	1	35°	92,7	38,0	237	100	130	260	44,1	52 x 4mm	W38x2x18 DIN5480
	43504300104	1	35°	92,7	38,0	229	85	130	248	73,3	3" x 0,064"	W38x2x18 DIN5480
	43504300105	1	35°	92,7	38,0	229	85	130	248	71,6	3 1/2" x 0,095"	W38x2x18 DIN5480
	43504300108	1	35°	92,7	38,0	237	110	130	253	44,1	50 x 3mm	W38x2x18 DIN5480
381	43814300101	1	25°	109,4	42,0	295	110	178	326	85,1	90 x 2,5mm	W55x2,5x20 DIN5480
	43814300103	1	25°	109,4	42,0	295	110	178	326	83,4	90 x 3,5mm	W55x2,5x20 DIN5480
	43814300104	1	25°	109,4	42,0	295	110	178	326	84,4	3 1/2" x 0,095"	W55x2,5x20 DIN5480
	43814300106	1	25°	109,4	42,0	275	110	178	317	71,6	3" x 0,095"	W55x2,5x20 DIN5480
385	43854300301	1	25°	129,2	48,0	327	130	197	358	82,1	92 x 5mm	W65x2,5x24 DIN5480
	43854300303	1	25°	129,2	48,0	327	130	197	358	79,1	92 x 6,5mm	W65x2,5x24 DIN5480
	43854300304	1	25°	129,2	48,0	367	150	197	398	82,1	92 x 5mm	W65x2,5x24 DIN5480
389	43894300101	1	30°	138,9	53,0	373	130	202	415	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894300103	1	30°	138,9	53,0	358	130	202	400	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894300201	1	30°	138,9	53,0	373	150	242	415	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894300203	1	30°	138,9	53,0	393	180	242	435	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894300801	1	44°	138,9	53,0	363	150	252	390	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894300802	1	44°	138,9	53,0	383	180	252	425	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894301001	1	44°	138,9	53,0	363	150	242	405	90,1	100 x 5mm	W72x2,5x27 DIN5480
	43894301002	1	44°	138,9	53,0	383	180	242	425	90,1	100 x 5mm	W72x2,5x27 DIN5480
395	43954300101	1	25°	155,9	57,0	405	180	272	452	98,1	110 x 6mm	W80x2,5x30 DIN5480
	43954300102	1	25°	155,9	57,0	362	160	272	388	108,1	120 x 6mm	W80x2,5x30 DIN5480
420	44204300101	2	25°	84,7	30,2	207	60	65	225	73,3	3" x 0,064"	SAE 1 1/2" x 16C RILSAN
	44204300102	2	25°	84,7	30,2	207	60	65	225	71,6	3" x 0,095"	SAE 1 1/2" x 16C RILSAN
	44204300201	1	25°	84,7	30,2	208,5	100	85	232	44,1	52 x 4mm	W38x2x18 DIN5480
	44204300203	1	25°	84,7	30,2	200,5	80	85	220	73,3	3" x 0,064"	W38x2x18 DIN5480
	44204300204	1	25°	84,7	30,2	200,5	80	85	220	71,6	3" x 0,095"	W38x2x18 DIN5480
424	44244300101	1	35°	100,0	35,0	240	120	193	257	64,1	70 x 3mm	W45x2,5x16 DIN5480
	44244300103	1	35°	100,0	35,0	229	110	193	246	84,3	3 1/2" x 0,095"	W45x2,5x16 DIN5481
	44244300104	1	35°	100,0	35,0	229	110	193	246	84,1	90 x 3mm	W45x2,5x16 DIN5482
434	44344300201	1	44°	137	52	330	130	195	361	82,1	92 x 5mm	W65x2,5x24 DIN5480
	44344300202	1	44°	137	52	330	130	195	347	79,2	92 x 6,5mm	W65x2,5x24 DIN5480
	44344300301	1	44°	137	52	363	150	252	-	90,1	100 x 5mm	W72x2,5x27 DIN5480
	44344300302	1	44°	137	52	383	180	252	-	90,1	100 x 5mm	W72x2,5x27 DIN5480
	44344300401	1	44°	137	52	373	150	252	-	90,1	100 x 5mm	W72x2,5x27 DIN5480
	44344300402	1	44°	137	52	393	180	252	-	90,1	100 x 5mm	W72x2,5x27 DIN5480
445	44454300101	1	27°	151,2	52	345	180	223	378	102,1	120 x 4mm	W75x2,5x28 DIN5480
	44454300102	1	27°	151,2	52	275	110	223	295	102,1	120 x 4mm	W75x2,5x28 DIN5481
446	44464300101	1	27°	151,2	53	345	180	223	378	102,1	120 x 4mm	W75x2,5x28 DIN5480
468	44684300101	1	22°	(95)	68	348	110	195	367	82,1	110 x 6mm	W80x2,5x30 DIN5480
	44684300102	1	22°	(95)	68	370	110	195	389	79,2	140 x 5mm	W80x2,5x30 DIN5480

DIMENSIONS AND ILLUSTRATIONS ARE SUBJECT TO CHANGE, AND WE RESERVE THE RIGHT TO INTRODUCE MODIFICATIONS WITHOUT PRIOR NOTICE.
DIE MASSE UND ZEICHNUNGEN SIND UNIVERBINDLICH UND KÖNNEN OHNE VORHERIGE BEKANTGABE GEÄNDERT WERDEN.
ÖLÇÜ VE RESİMLER BAĞLAYICI OLMAYIP , BİLDİRİLMESİZİN DEĞİŞTİRİLEBİLİRLER.

UZMAN KARDAN

12

SLEEVE YOKES ASSY / NABENMITNEHMER / KAYICI ÇATAL KOMPLELERİ

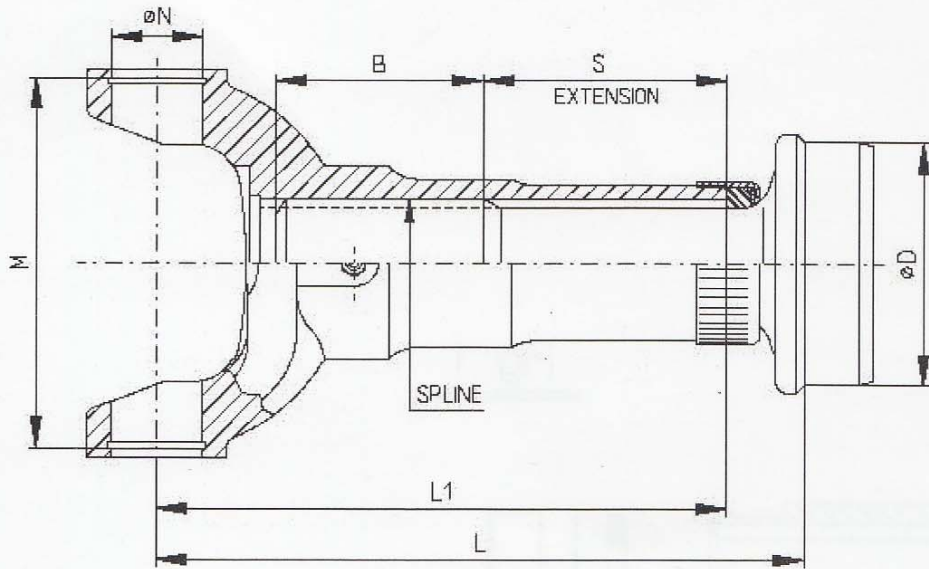


FIG. 1

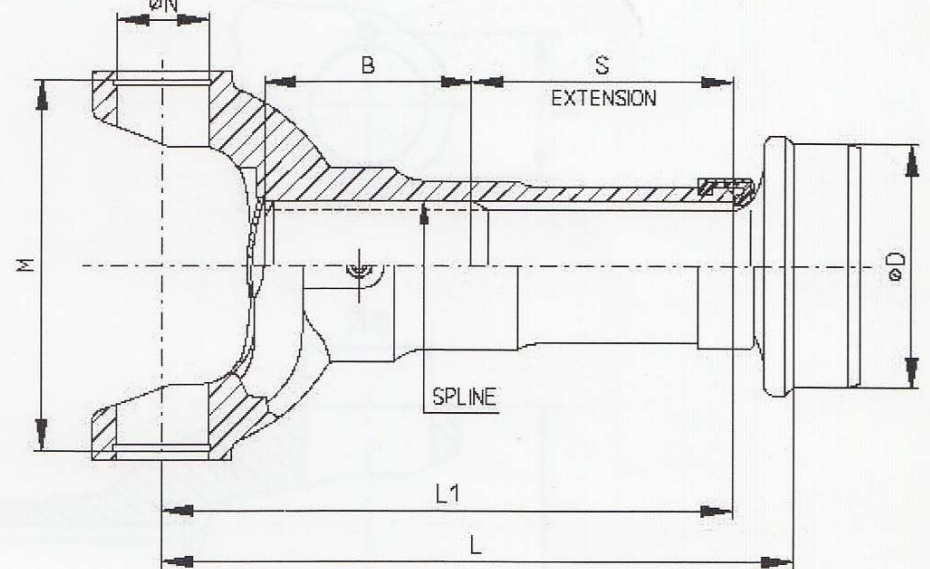


FIG. 2

KAT-03-K1

27.09.06

SERIE BAUGR SERİ	NEW PART NO TEIL NR NEU YENİ PARÇA NO	FIG.	ANGLE WINKEL AÇI	M	N	L	S	B	L1	D	TUBE O.D.xW.THICKNESS ROHRDURCHMESSERxDICKE BORU ÇAPIXET KALINLIĞI	SPLINE DATA ZAHNPROFIL KANAL ÖLÇÜLERİ
1140	41140300605	1	17°	64,2	23,8	127	40	44	109,5	47,7	Ø50,8 x 1,6	SAE Ø27 x 16C
	41140300606	1	17°	64,2	23,8	127	40	44	109,5	46,2	Ø50,8 x 2,4	SAE Ø27 x 16C
	41140300607	1	17°	64,2	23,8	132	40	44	109,5	66,9	Ø70 x 1,6	SAE Ø27 x 16C
1300	41300300301	2	20°	77,5	27,0	177	50	61	156	44,1	Ø52 x 4	SAE Ø38,1 x 16C
	41300300302	2	20°	77,5	27,0	170	60	61	156	46,2	Ø50,8 x 2,4	SAE Ø38,1 x 16C
	41300300303	2	20°	77,5	27,0	177	57	61	156	73,3	Ø76,2 x 1,6	SAE Ø38,1 x 16C
	41300300304	2	20°	77,5	27,0	177	57	61	156	72,3	Ø76,2 x 2,1	SAE Ø38,1 x 16C
	41300300901	1	20°	77,5	27,0	156	55	54	136,6	46,2	Ø50,8 x 2,4	SAE Ø34,9 x 16
1310	41310300601	1	20°	84,7	27,0	155	55	57	136,5	60,6	Ø63,5 x 1,6	SAE Ø34,9 x 16C
	41310300602	1	20°	84,7	27,0	155	55	54	136,5	46,2	Ø50,8 x 2,4	SAE Ø34,9 x 16C
	41310300605	1	20°	84,7	27,0	155	55	57	136,5	66,9	Ø70 x 1,6	SAE Ø34,9 x 16C
	41310300606	1	20°	84,7	27,0	155	55	57	136,5	73,3	Ø76,2 x 1,6	SAE Ø34,9 x 16C
	41310300802	1	30°	84,7	27,0	185	72	57	166	46,2	Ø50,8 x 2,4	SAE Ø34,9 x 16C
	41310300803	1	30°	84,7	27,0	185	75	54	166	46,2	Ø50,8 x 2,4	SAE Ø34,9 x 16C
	41310300805	1	30°	84,7	27,0	187	70	57	166	71,6	Ø76,2 x 2,4	SAE Ø34,9 x 16C
	41310300806	1	30°	84,7	27,0	187	70	57	166	73,3	Ø76,2 x 1,6	SAE Ø34,9 x 16C
	41310307501	2	20°	84,7	27,0	153	55	57	136,5	60,6	Ø63,5 x 1,6	SAE Ø34,9 x 16C
	41310307502	2	20°	84,7	27,0	153	55	54	136,5	46,2	Ø50,8 x 2,4	SAE Ø34,9 x 16C
	41310307505	2	20°	84,7	27,0	153	55	54	136,5	66,9	Ø70 x 1,6	SAE Ø34,9 x 16C
	41310307506	2	20°	84,7	27,0	153	55	54	136,5	73,3	Ø76,2 x 1,6	SAE Ø34,9 x 16C
	41310308301	2	20°	84,7	27,0	186	60	61	166	73,3	Ø76,2 x 1,6	SAE Ø38,1 x 16C
1410	41410300103	1	20°	109,2	30,1	193	70	61	168	84,3	Ø88,9 x 2,4	SAE Ø38,1 x 16C
	41410300105	1	20°	109,2	30,1	186	55	76	168	45,7	Ø50,8 x 2,8	SAE Ø38,1 x 16C
	41410300106	1	20°	109,2	30,1	191	70	61	168	71,6	Ø76,2 x 2,4	SAE Ø38,1 x 16C
	41410302501	1	30°	109,2	30,1	218	70	61	193	84,3	Ø88,9 x 2,4	SAE Ø38,1 x 16C
	41410302504	1	30°	109,2	30,1	215	80	76	193	45,7	Ø50,8 x 2,8	SAE Ø38,1 x 16C
	41410302505	1	30°	109,2	30,1	221	90	61	193	71,6	Ø76,2 x 2,4	SAE Ø38,1 x 16C
	41410302506	1	30°	109,2	30,1	219	70	61	193	71,6	Ø76,2 x 2,4	SAE Ø38,1 x 16C
	41410305601	2	20°	109,2	30,1	186	70	61	168	71,6	Ø76,2 x 2,4	SAE Ø38,1 x 16C
	41410305602	2	20°	109,2	30,1	186	70	61	168	84,3	Ø88,9 x 2,4	SAE Ø38,1 x 16C
1430	41430300501	1	22°	95	30,1	178	55	61	148	58,6	Ø63,5 x 2,4	SAE Ø38,1 x 16C
	41430300502	1	22°	95	30,1	178	55	63	148	58,9	Ø63,5 x 2,4	SAE Ø38,1 x 16C
1480	41480300102	1	22°	109,2	34,9	198	70	63	173	71,6	Ø76,2 x 2,4	SAE Ø44,45 x 16C
	41480300104	1	22°	109,2	34,9	198	75	63	173	84,3	Ø88,9 x 2,4	SAE Ø44,45 x 16C
	41480300105	1	22°	109,2	34,9	198	60	75	173	84,3	Ø88,9 x 2,4	SAE Ø44,45 x 16C
	41480300106	1	22°	109,2	34,9	198	60	75	173	71,6	Ø76,2 x 2,4	SAE Ø44,45 x 16C
1510	41510300101	1	20°	119,3	39,6	195	70	65	170	71,6	Ø76,2 x 2,4	SAE Ø44,45 x 16C
	41510300104	1	20°	119,3	39,6	195	75	63	170	84,3	Ø88,9 x 2,4	SAE Ø44,45 x 16C

DIMENSIONS AND ILLUSTRATIONS ARE SUBJECT TO CHANGE, AND WE RESERVE THE RIGHT TO INTRODUCE MODIFICATIONS WITHOUT PRIOR NOTICE.

DIE MASSE UND ZEICHNUNGEN SIND UNIVERBINDLICH UND KÖNNEN OHNE VORHERIGE BEKANTGABE GEAENDERT WERDEN.

ÖLÇÜ VE RESİMLER BAĞLAYICI OLMAYIP , BİLDİRİLMESİZİN DEĞİŞTİRİLEBİLİRLER.